


Square flag with side arm
Small

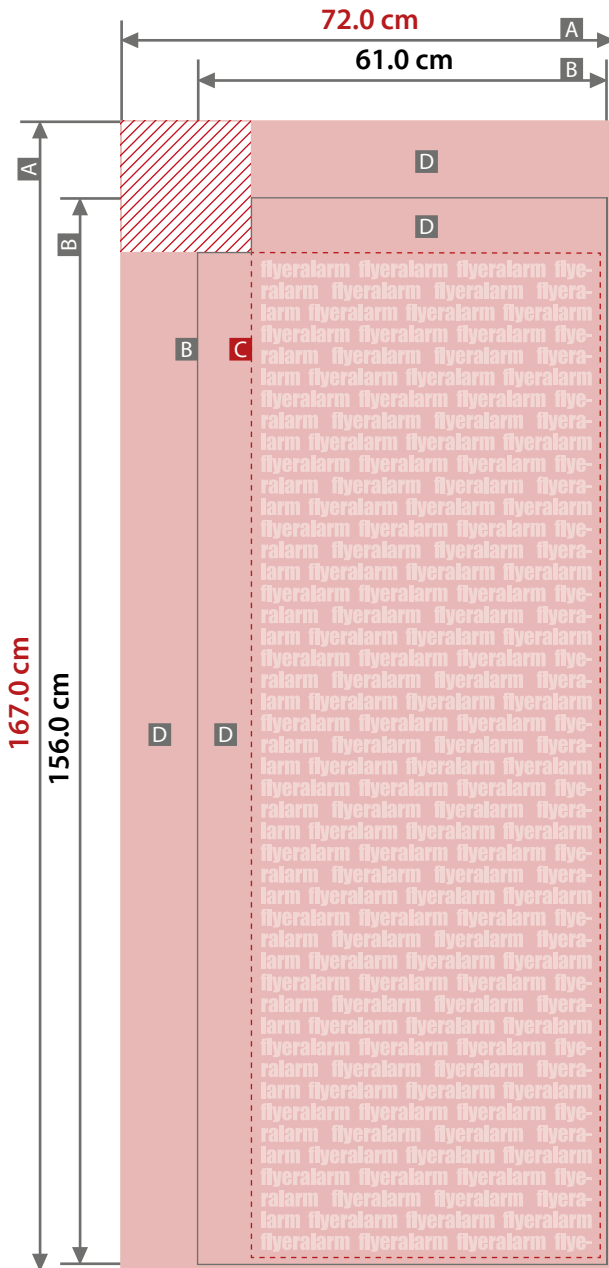

Create file alignment as shown
Even applies if the alignment of your artwork does not correspond to the alignment of the format.

Use of the template
Apply the template with a scale of 1:1 to position your graphical elements and to verify your design settings – the template already has the correct artwork format (do not scale). Please remove the template from your artwork again before the upload.

Sketches are not to scale



Seam allowance (x)
right / bottom 1.0 cm
Safety distance (y)
right / bottom 3.0 cm

Seam allowance Hem stitch (x1)
left / top 10.0 cm
Safety distance Hem stitch (y1)
left / top 10.0 cm

A = Artwork format
B = Finished format
C = Seam
D = Hem stitch
diameter 5.0 cm

This area will be cut off from artwork format (see template)

Our tip:
We recommend to wash flag before use to remove possible excess colour.



Tips and Tricks

The durability of a flag depends a lot on its exposure to wind, air pollution and other climatic conditions. Depending on its location, other influences may also occur. A normal wear and tear can therefore not be avoided.

Flags are among fabrics one of the most heavily stressed material and are therefore subject to strong deterioration due to their outdoor use.

That's how you can improve the durability of your flags:

- Bring in your flag at night in case of bad weather conditions or strong wind;
- Make sure the flag does not touch anything when blowing as this might increase the risk of an early material wearout;
- Repair holes and other damages immediately;

The normal wearout that comes with age and period of usage does not justify a complaint. No rights of claim can be derived from damages to normal wear and tear.